“C” Series Elements

HYCOA Pleated Paper Elements

HYCOA’s “C” Series cartridges are designed to meet the critical service demands of industrial applications. Providing superior versatility and performance these elements are available in a wide range of filtration efficiency rating from 1/2 micron nominal to 20 micron nominal.

The “C” series provides a wide range of filtration elements to meet the demands of industrial filtration. These elements are constructed of fine grades of resin impregnated cellulose media manufactured to precise specifications for HYCOA. The design of the element maximizes pleat configuration to ensure stable performance and long filter life.

Features / Benefits

- Range of Standard Sizes: (310, 618, 636)
- Heavy gauge ETP steel end caps
- ETP steel outer jacket
- Steel I-core (100 psi collapse rating)
- Buna-N Gaskets
- Nominal Rated Filtration
- Efficiency Ratings: 1/2 uM, 3 uM, 5 uM, 10 uM, 20 uM
- Double box packaging

Performance / Applications

Performance:
- Maximum Temperature: +250°F
- Minimum Temperature: -20°F
- Collapse Pressure: 100 PSID
- Change-Out Pressure: 25 PSID

Applications:
- Lube Oil
- Cutting Oil
- Fuels
- Hydraulic Oil
- Gear Oil

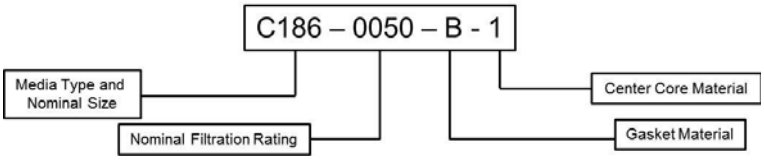

Efficiency Rating:

C-186
C-366

Clark-Reliance continues to be the global leader in the level indication and control, sightflow indication, and filtration and separation industries. Clark-Reliance is fully committed and dedicated to providing the lowest “cost-of-ownership”, innovative products and solutions.

Copyright © 2017 Clark-Reliance Corporation. All Rights Reserved.

REPRESENTED BY: YATES & COMPANY, INC.
1 Hollywood Ave, Unit 22 HoHoKus, NJ 07423
Tel: 201-345-3101
Email: info@yatesco.net